Latour
Wall mounted hood

2 YEAR
GUARANTEE

Features

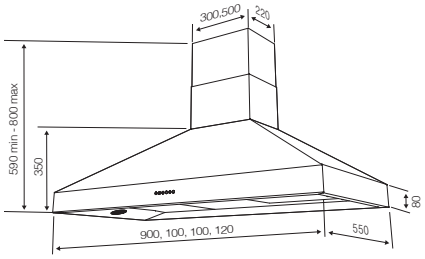

Designed for ducting out or recycling

- Quick release dishwasher proof grease filters
- Suitable for use with back panel
- 2 x halogen lamps 20 watts
- A convenient filter alarm that tells you when to clean the grease filters for ultimate efficiency
- Automatic switch-off can be set for 10 minutes

When recycling you will require

- Recycling filter kit – CT-KIT (90cm/100cm/110cm x 2, 120cm x 3)
  charcoal filters are supplied with kit
- Replacement charcoal filter – W0424-KF3 (90cm/100cm/ 110cm x 2, 120cm x 3)

When ducting out you will require

- Ducting outlet size 150mm (diameter)

Speed	1	2	3	4
Air capacity cubic metres per hour*	300	500	700	1000
Pressure mmH^{2}0	24	39	49	55
Input - watts	100	125	160	250
Noise level - dbA**	30	40	45	52

Size options

Available in 90cm, 100cm, 110cm or 120cm

Colour options

Stainless steel

* Performance data according to Standard EN61591. Free air delivery.

**Noise level according to Standard IEC60704-2-13 method. All noise level – dbA figures are tested on ducted hoods.

For further information please ring **0844 463 9705** or visit **www.britanniaiving.co.uk**